


ENTRANCE CONTROL PRODUCTS



**CCTV
PRODUCTS**

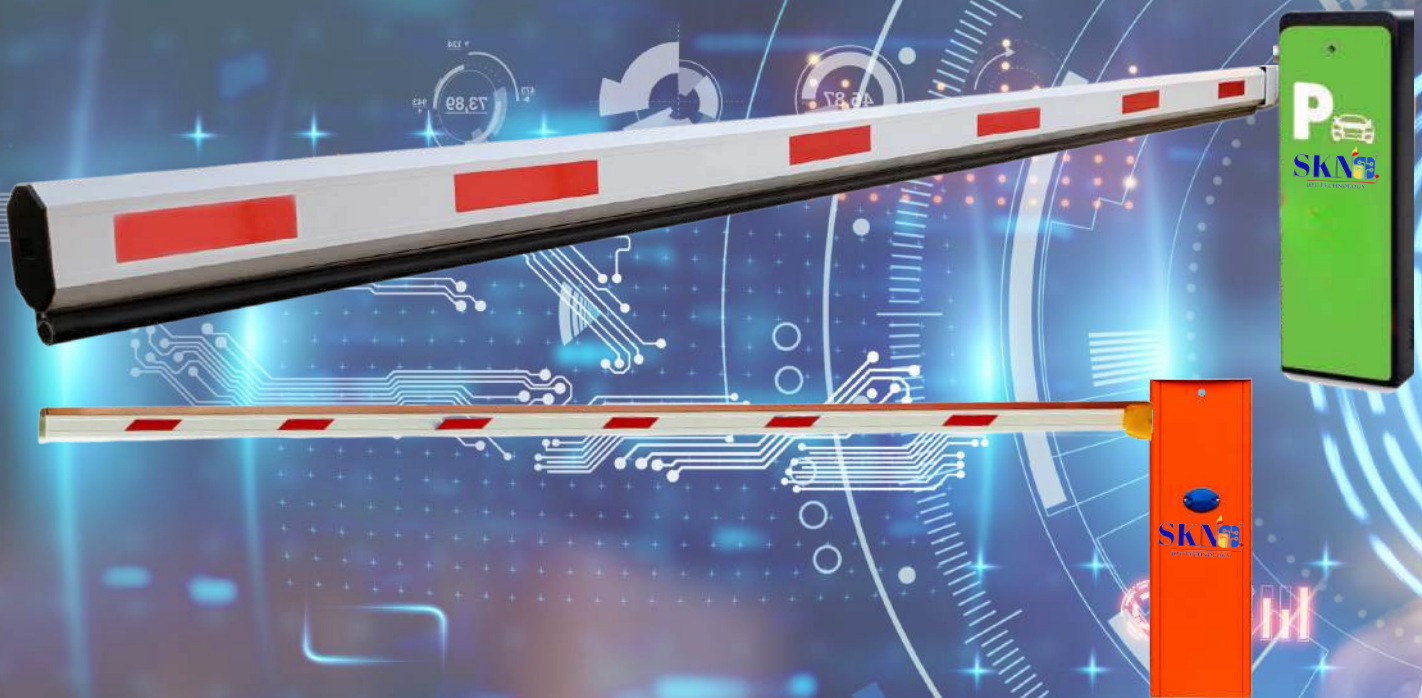

**ENTRANCE
PRODUCTS**



**UHF
READER**



**RFID
CARDS**



**ACCESS
CONTROL**



ABOUT US

SKN IOT TECHNOLOGY

SKN IOT TECHNOLOGY manufactures best products for Surveillance Entrance Automation and entrance control software's, we believe in quality and deliveries , we want to make sure that our associates break all barriers and bring new revolution in the industry with dynamic product range .



"Our aim is to make all Surveillance and Entrance Products in INDIA and working in the same direction , will do new wonders in the industry ASAP with our partner's support."



"Always believe in feedback and act on the same."



"We want to grow with happy customers , therefore will make our best products and deliver the same"



Entrance Products




Parking Boom



SKN-BB-093-6M
Super Fast Boom Barrier
Motor : 24V DC Brushless
Motor Opening / Closing Time :
2.5 Sec Length: Up to 6mtr
Telescopic Boom

Types of Boom Arms

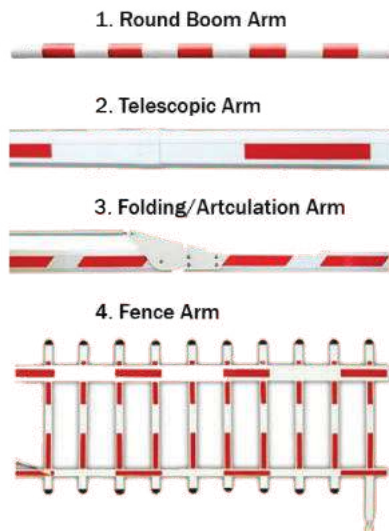

Toll Boom Barrier



SKN-TB-033
Toll Boom Barrier
Motor : 24V DC Brushless
Motor Opening / Closing Time :
0.6 Sec Length: Up to 3mtr
Round Boom Straight Arm

Parking Products



SKN-TD-011
Automatic Ticket Dispenser
Input Supply : 220V AC
Communicate : TCPIP
Card Support : Mifare
Reading range : 5-10 cm



SKN-USS-22
Ultrasonic Sensor
Input Supply : 10V-24V DC
Detection Mode : Ultrasonic
Detection Detecting Distance : 0.3m
to 4.5m



SKN-LED21
Display Unit
Input Supply : 220V AC
Display : 5mm Ultra Bright
Communicate : RS 485
Enclosure : MS Powder Coated

UHF Reader



SKN-UHF-150/ SKN-UH-15005
Weigand / Rs232/ TCPIP
Frequency : 865868MHz/902928MHz
Range : 6Mtr*



SKN-UHF-026 /SKN-UH15016-RJ
Weigand : RS232 / Rs232 TCPIP
Frequency : 865868MHz/902~928MHz
Range : 15Mtr*




SKN-UHP-10
UHF Reader Pole

Access Controller



SKN-DC-4211
1 Door / 2 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34

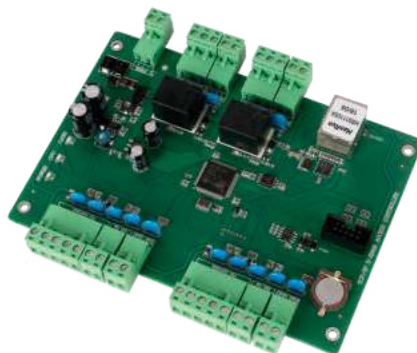

SKN-DC-8411
2 Door / 4 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34



SKN-DC-6433
4 Door / 8 Reader
Communication : LAN
Register Cards : 42000
Record Capacity : 200000
Camera can be Integrate
Input: Wiegand26/34

Loop Detector



SKN-LD100
Sensitivity: Adjustable in 4 levels
Response Time: 10ms
Working Temperature: -20C~+65 C
Max Loop Size: 8Mx1M
Output Mode Relay
Power Supply: AC110/220V+-10% 50/60Hz; DC 12/24V

Safety Beam Sensor



SKN-PC-11
Power supply : 12V~24V AC/DC
Max. Range: 15M
Input: RX 15mA, TX 30mA
Infrared frequency: 1.92KH
Wave length: 940nm
Relay output: 1A max 36V

Push Button



SKN-PB100
Material: Polyvinyl
Chloride Colour :
Green,Red, Yellow Style :
Circuits,Safety
Finish Type : Pvc

Traffic Light



SKN-TL
Modular design, LED-based trafıc signals
Applications include trafıc and industrial signaling
Wide operating voltage range 100-240VAC
High quality, high output LED light source
Size-50mm/100mm/200mm/300mm
Module shape- Round

Flashing Light&Siren



SKN-FL-22
Flasher Light Hooter Siren Standalone for
220 volt Ac/ 110 Volt Ac Operate and 12 Volt
DC, 24 Volt DC for Alarm System

Flap Barriers



SKN-FB -2100/2200

Single /Multi Lane Flap Barrier with LED
Housing Material : SS 304
Indicators : LED for direction with arrow marks
Bi-directional single passage/ multi passage
Free passage in the set direction Feature
Always free or locked Feature

Swing Barriers



SKN-SFB -3300/2400

Single /Multi Lane Swing Barrier with LED
Housing Material : SS 304
Indicators : LED for direction with arrow marks
Bi-directional single passage/ multi passage
Free passage in the set direction Feature
Always free or locked Feature

Vertical Turnstile



SKN-VT-1100

Vertical Turnstile
Housing Material : SS 304
Direction : Single or bi-directional
Indicators: LED for direction with arrow marks
Free passage in the set direction
Feature Always free or locked Feature

Bridge Turnstile



SKN-BT1100

Vertical Turnstile
Housing Material : SS 304
Direction : Single or bi-directional
Indicators: LED for direction with arrow marks
Free passage in the set direction
Feature Always free or locked Feature

Full Height



SKN-FHT-1100/2200

Single/Dual Lane Full Height Transtile
Housing Material : SS stainless steel outer body & arms
Direction : Single or bi-directional
Indicators : LED for direction with arrow marks
Free passage in the set direction Feature
Always free or locked Feature

P Type Swing Gate



SKN-PS-1122

Housing Material : SS 304
Indicators : LED for direction with arrow marks
Bi-directional single passage/ multi passage
Free passage in the set direction Feature
Always free or locked Feature

Tyre Killer



SKN-TK3000/4000/6000

Robust Construction
capable of puncturing vehicle tires
effectively Motorized Operation
Integrated Safety Features
Anti-Corrosion Coating
Anti-Tamper Mechanism
Modular Design

Bollard



SKN-AB3300

Automatic Rising and Lowering
Remote Control Operation
Durable Construction
built-in LED lights or reflective strips to enhance visibility Can Be Integrated with traffic Management system.

Road Blocker



SKN-RB2200

Easy installation
Sturdy construction
Available in varied patterns

Baggage Scanner



SKN-B S550

High-Resolution X-ray-Imaging
Multiple Viewing Modes
Threat Detection Algorithms
Automated Detection of -Threat Objects
Can be connected with -Surveillance System
Compliance with Regulatory-Standards

DFMD



SKN-DFMD-1Z/6Z/9Z

Single / Multi-Zone Detection (1zone to 32zone)
Alarm System
Discrimination Technology
User-Friendly Interface
Durable Construction
Counting Function
Portable / Easy to Installation

HHMD



SKN-HHMD

Sensitivity Adjustment
Multy Detection Modes
Come with rechargeable batteries



Sliding Gate Operator



SKN-SLG500/800/1200

Come with Keys in case of emergency or power failure.
Soft start and soft stop.
Resistance sensitivity and auto-closing delay time adjustable.
Stop/reverse in case if obstruction during gate opening/closing.
Reliable magnetic limit supplied.

SKN-RS600/800/1000/1200

Overheat protection and overload protection
Low noise
Easy manual operation when power failure
Precise/accurate Limit switch
Security-with anti-fall protection device



Swing Gate Operator



SKN/FSG 600/800/1000

Soft start and soft stop,
Stop working when gate meets obstacle.
Clutch device for power failure,
Copper motor and gear worm for stable -
performance and longer working life
Adjustable opening/closing interval -
between master and slave gate.
Adjusting residence sensitivity

Sliding Door Operator



SKN-99-12

Intelligent micro control based system
Smart self-learning system
low noise, open and close smoothly
Built-in receiver working with learning code remote
Special track and hanger design to make safe working
Various terminal, work with access keypad, photocell, UPS,
interlock function

RFID Cards



SKN-P01

Proximity Thin
Cards Frequency :
125KHz



SKN-PT01

Proximity Thick Cards
Frequency : 125KHz



SKN-MF1K

Mifare 1KB Thin Cards
Frequency : 13.56MHz



SKN-UHF10

UHF Cards
860-960MHz



SKN-U-TG30

UHF Windshield Tags
Non Tearable
860-960 MHz

EM Locks, Housing with Power Supply



SKN-SD600LB

Holding Force : 280KG
(600Lbs) Single Door
Power : 12 to 24 VDC
Body Type : Zinc



AGS-HWS-150



SKN Access Control Software utilizes an SQL database to manage and secure physical access. It offers user profiles, event logging, and scalability. It integrates with other systems and provides a user-friendly interface for efficient access control and monitoring



SKN-2U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-9UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-4U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-6UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-42UN

Floor Standing Flexibox,
600W x 1000D/600W x 600D/ mm
Exquisite design with precise dimension and
craftsmanship, Cable entry on Top and
Bottom coverWelded Frame, dependable
structure, Material SPCC Cold Rolled
SheetFront Toughened Glass Door and Back
Steel
Door with Lock and Keys, Turning angle
of front and rear door over 180°



SKN-4UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-6U

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\



SKN-12UN

Wallmount Flexibox, 550W x 400D mm
The bottom and roof of the Flexibox have-
easy-to-remove knock outs. These knocks
- can be used for cable entry/exits\

SKN-24UN

Floor Standing Flexibox,
600W x 1000D/600W x 600D/ mm
Exquisite design with precise dimension and
craftsmanship, Cable entry on Top and Bottom
coverWelded Frame, dependable structure,
Material SPCC Cold Rolled SheetFront
Toughened Glass Door and Back Steel
Door with Lock and Keys, Turning angle
of front and rear door over 180°



GET IN TOUCH



SKN IOT TECHNOLOGY

Plot No-315,
Rudrapur, Pahala, Bhubaneswar, Odisha-21

sales@skntechnology.in

www.skntchnology.in

+91 82499 42919

