

PH14-425-80 (Preheat Start)

UV Electronic Ballast

Technical Specification

Product Model : PH14-425-80 (230) **Input Voltage :** AC220V±20% **Ordering Code :** 14H23042580D5

Product Model : PH14-425-80 (MLT) **Input Voltage :** AC110-220V±10% **Ordering Code :** 14HMLT42580D5

Starting Mode: Preheat Start, Starting Time 4-6S

Input Current : 0.35A@230V ; 0.72A@110V **Power Frequency :** 50/60Hz

Input Features: Lightning protection ; PF0.98 ; Efficiency (η): 90%, THD<10, CCF<1.7

Output Power : 80W **Output Power Range :** 38-90W **Number of Lamps :** 1pc

Output Current : 425mA **Output Current Range :** 400-440mA

Auxiliary Output : lamp ON Output: DC 5 V / 5 mA (for External LED Indicator)

Output Features : Constant Current, overvoltage protection; overcurrent protection; lamp leakage detection; filament open-circuit protection; cross-wiring protection; end-of-life(EOL) Protection

Standards Compliance: IP64; CE certified

Ambient Temperature: -10°C~40°C **Maximum Enclosure Temperature:** <70°C **Humidity:** 5% – 85%

Housing Construction: Aluminum housing with U.S.-style potting compound

Housing Dimensions : 215*44*28mm **Mounting Hole Spacing :** 210mm




Connection Method: 0.75 mm² multi-strand wire, length 330 mm; distance between ballast and lamp <5 m

Outer Carton Size : 460*305*180mm **Net Weight per Unit :** 0.31KG **Quantity per Carton:** 50 pcs

Gross Weight per Carton: 16 kg **Tare Weight (T.W.) :** 0.5kg

Compatible Lamp Models : GPH793T5, GPH843T5, GPH1148T5, GPH1554T5, GPH1630T5, G36T5, G48T5, G64T5, G67T5, TUV64T5, TUV75T5

Applications: Wastewater treatment, water purification, exhaust-gas treatment, air purification, printing, pharmaceuticals, medical care, food processing, aquaculture, etc.

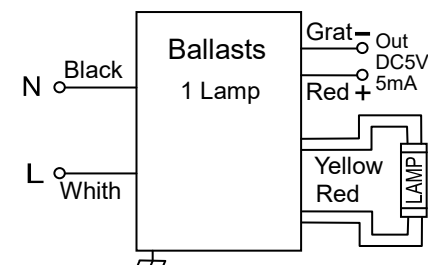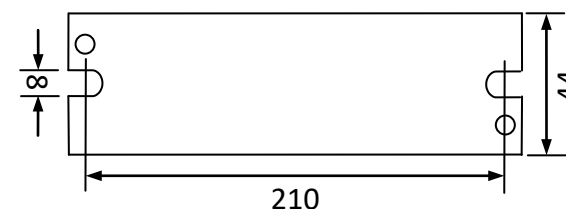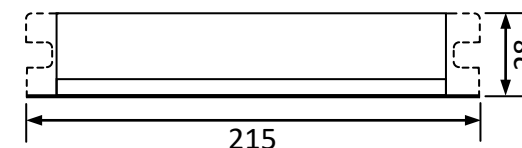

Dimensions: 215*44*28mm



International Sales & Export:
Wenzhou Chaoneng Water Treatment Equipment Co., Ltd.
Address: Yueqing Science & Technology Incubation and Entrepreneurship Center
(National-Level Technology Business Incubator), No. 261, Wei 17th Road,
Yueqing Economic Development Zone, Yueqing, Wenzhou, Zhejiang, China
Tel.: 0577-6266 6115
Mobile/WeChat/WhatsApp: +86 186 1227 8922
Email: chen@chaonenguv.com
Manufacturer:
Beijing Haoben Electronic Technology Co., Ltd.
Address: Building 3, No. 30 Shixing Street, Shijingshan Park, Zhongguancun Science Park, Beijing, China
Tel.: 010 6883 7150