

PN15-300-4-18 (Instant Start)

UV Electronic Ballast

Technical Specification

Product Model : PN15-300-4-18 (230) Input Voltage : AC230V±10% Ordering Code : 15N230300418D5

Product Model : PN15-300-4-18 (110) Input Voltage : AC110V±10% Ordering Code : 15N110300418D5

Starting Mode: Instant Start, Starting Time < 1S

Input Current : 0.35A@230V ; 0.72A@110V Power Frequency : 50/60Hz

Input Features: Lightning protection ; PF0.98 ; Efficiency (η): 90%

Output Power : 4*18W

Output Power Range : 4*6-18W

Number of Lamps : 4pcs

Output Current : 300mA

Output Current Range : 180-300mA

Auxiliary Output : lamp ON Output: DC 5 V / 5 mA (for External LED Indicator)

Output Features: Non-constant-current operation

Standards Compliance: IP64; CE certified

Ambient Temperature: -10°C~40°C

Maximum Enclosure Temperature: <70°C

Humidity: 5% – 85%

Housing Construction: Aluminum housing with U.S.-style potting compound

Housing Dimensions : 245*44*28mm

Mounting Hole Spacing : 240mm

Connection Method: 0.75 mm² multi-strand wire, length 330 mm; distance between ballast and lamp <1 m

Outer Carton Size : 595*260*135mm

Net Weight per Unit : 0.35KG

Quantity per Carton: 50 pcs




Gross Weight per Carton : 18KG

Tare Weight (T.W.) : 0.5kg

Compatible Lamp Models : GPH118T5L, GPH150T5L, GPH212T5L, GPH287T5L, GPH303T5L,

GPH357T5L, TUV11W, TUV15W, TUV16W, LTC18

Applications: Wastewater treatment, water purification, exhaust-gas treatment, air purification, printing, pharmaceuticals, medical care, food processing, aquaculture, etc.

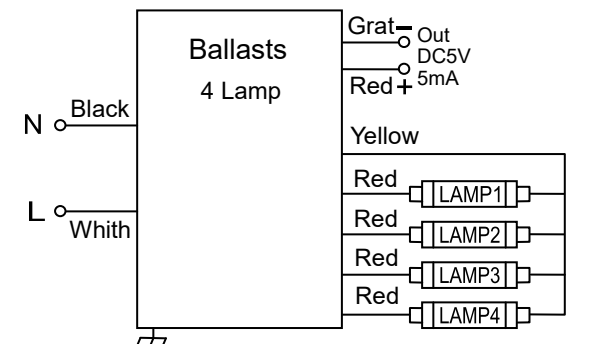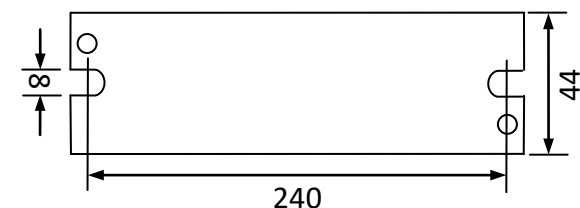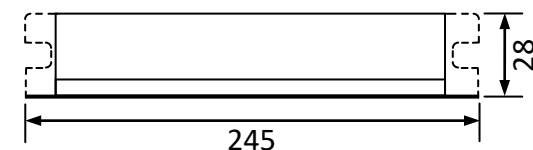

Dimensions: 245*44*28mm



International Sales & Export:
Wenzhou Chaoneng Water Treatment Equipment Co., Ltd.
Address: Yueqing Science & Technology Incubation and Entrepreneurship Center
(National-Level Technology Business Incubator), No. 261, Wei 17th Road,
Yueqing Economic Development Zone, Yueqing, Wenzhou, Zhejiang, China
Tel.: 0577-6266 6115
Mobile/WeChat/WhatsApp: +86 186 1227 8922
Email : chen@chaonenguv.com
Manufacturer:
Beijing Haoben Electronic Technology Co., Ltd.
Address: Building 3, No. 30 Shixing Street, Shijingshan Park, Zhongguancun Science Park, Beijing, China
Tel.: 010 6883 7150