



PH9-800-2-150 (Preheat Start)

UV Electronic Ballast

Technical Specification

Product Model : PH9-800-2-150 (230) **Input Voltage :** AC220V±20% **Ordering Code**9H2308002150D5FHL

Product Model : PH9-800-2-150 (MLT) **Input Voltage :** AC110-220±10% **Ordering Code**9HMLT8002150D5FHL

Starting Mode:Preheat Start,Starting Time 6-8S

Input Current : 1.3A@230V;2.7@110V **Power Frequency :** 50/60Hz

Input Features: Lightning protection,PF≥0.98,Efficiency (η): 90%,THD<10、CCF<1.7

Output Power : 2*150W **Output Power Range :** 2*72-155W **Number of Lamps :** 2pcs

Output Current : 800mA **Output Current Range :** 750-850mA

Auxiliary Output: Green/red LED status indication (green: normal operation; red: fault); 5 VDC/5 mA output for LED indication; dry-contact relay output for remote status feedback and control.

Output Features : Constant Current,overvoltage protection;overcurrent protection;lamp leakage detection; filament open-circuit protection;cross-wiring protection;end-of-life(EOL) Protection

Standards Compliance: IP64; CE certified

Ambient Temperature : -10°C~40°C **Maximum Enclosure Temperature :** <70°C

Humidity : 5-85% **Housing Construction:** Aluminum housing

Housing Dimensions : L250*W108*H56mm **Mounting Hole Spacing :** 240/65mm



Connection Type: European-Style Terminal Block; Ballast-to-Lamp Distance: < 5 m

Outer Carton Size : 605*270*145mm **Quantity per Carton :** 10pcs **Net Weight per Unit :** 1.05KG

Gross Weight per Carton : 11KG **Tare Weight (T.W.) :** 0.5kg

Compatible Lamp Models : GPH793T5L/HOGPH846T5L,HOGPH893T5L,HOGPH1000T5L,HOGPH1148T5L, HOGPH1554T5L,HOTUV75T5,HOGHO36T5L,GHO64T5L,TUV95WHOP-LTL100W

Applications: Wastewater treatment, water purification, exhaust-gas treatment, air purification, printing, pharmaceuticals, medical care, food processing, aquaculture, etc.

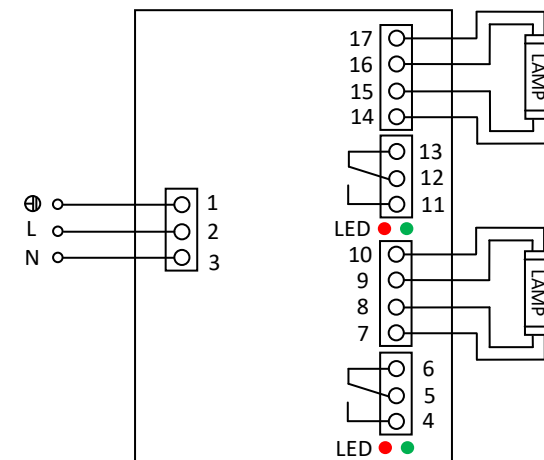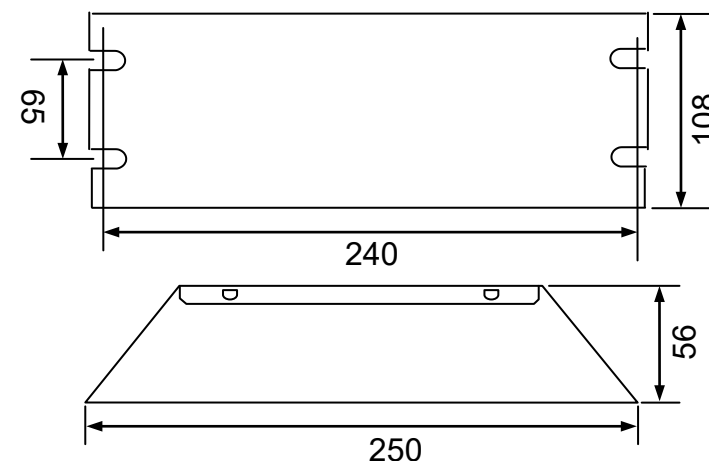

Dimensions: 250*108*56mm



International Sales & Export:
Wenzhou Chaoneng Water Treatment Equipment Co., Ltd.
Address: Yueqing Science & Technology Incubation and Entrepreneurship Center
(National-Level Technology Business Incubator), No. 261, Wei 17th Road,
Yueqing Economic Development Zone, Yueqing, Wenzhou, Zhejiang, China
Tel.: 0577-6266 6115
Mobile/WeChat/WhatsApp: +86 186 1227 8922
Email: chen@chaonenguv.com
Manufacturer:
Beijing Haoben Electronic Technology Co., Ltd.
Address: Building 3, No. 30 Shixing Street, Shijingshan Park, Zhongguancun Science Park, Beijing, China
Tel.: 010 6883 7150